



Apartament amplifiers ATP190 series

Models for terrestrial and satellite signals, adapted to the 1st and 2nd Digital Dividend.



Designed for installations with
satellite signal

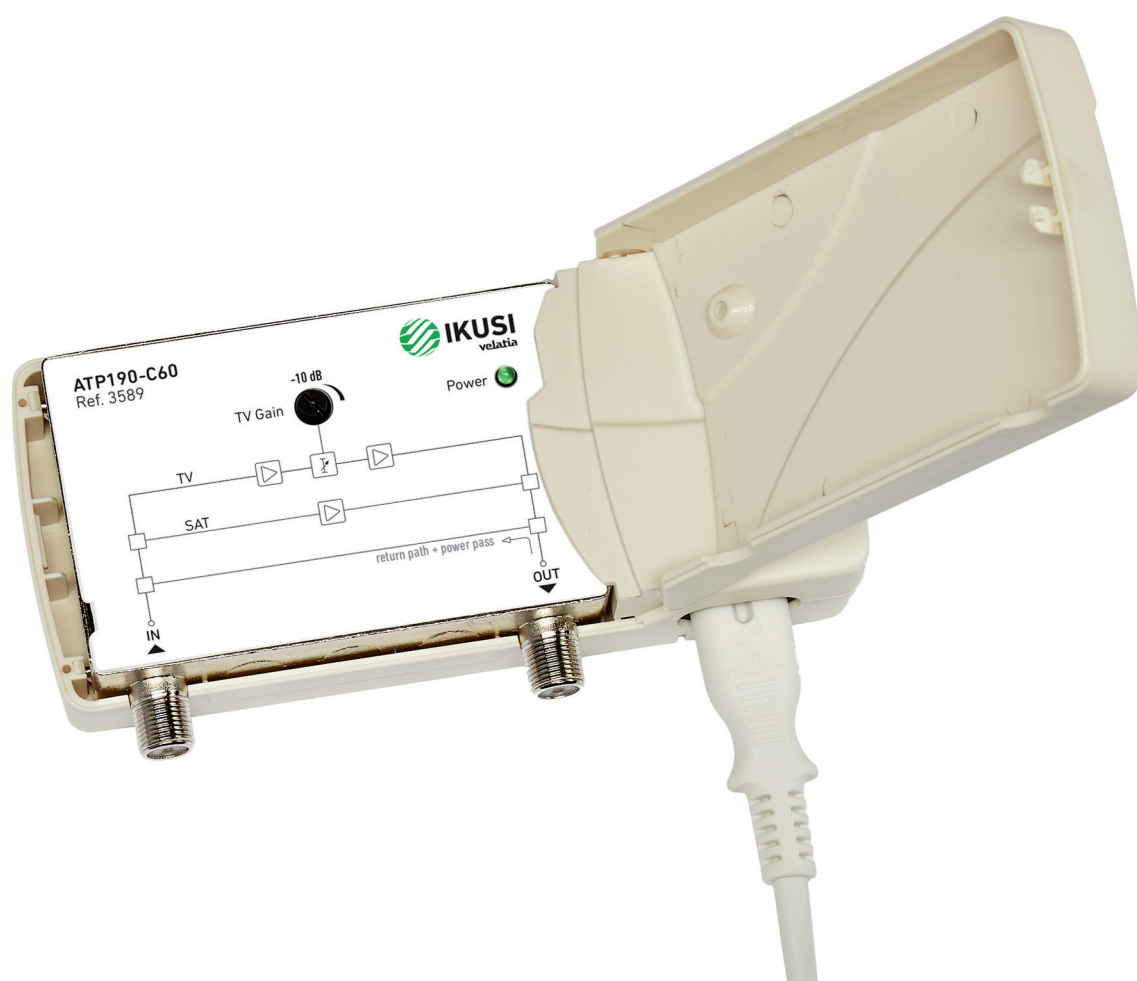

Models adapted to the 1st and 2nd
Digital Dividend




Using passive return

Main features

- Models adapted to the 1st and 2nd Digital Dividend.
- Terrestrial and satellite outputs.
- Gain adjustment potentiometers.
- Return path.
- DC transit.

Model	Ref. / EAN code	ATP190 series	
ATP190-C69	3588 / 843513643588	Frequencies MHz	47 - 862
ATP190-C60	3589 / 8435136435891		47 - 790
ATP190-C48	3590 / 8435136435907		47 - 694
Input			1
Output			1
Gain	dB	Terr: >18	Sat: >22
Gain adjustment	dB	Terr: >10	-
Output level	dB μ V	Terr: 106 IMD3 -60dB (DIN 45004B)	Sat: 112 IMD3 -35dB (EN 50083-3)
Return path frequency	MHz	5 - 30	
Noise figure	dB	<5	<6
Mains supply voltage	VAC	100 - 240	
DC transit	mA	500	
Consumption	W	<3	
Dimensions	mm	135 x70 x 30	

Installation example

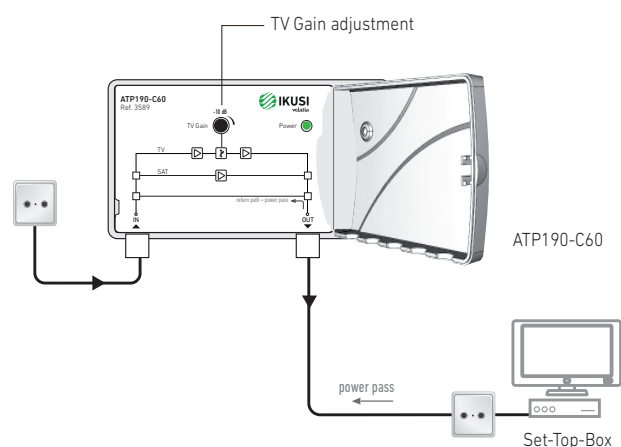

Quick Fix & Release bracket

