



IKUSI
velatia

smartexperience

Apartment amplifiers for VHF and UHF signals.
It has 2 outputs.



TV input



Models adapted to the 1st and 2nd
Digital Dividend



Gain adjustment



Two RF outputs


ATP200 amplifiers

Main features


- Models adapted to the 1st and 2nd Digital Dividend.
- TV amplifier.
- 1 RF input — 2 RF outputs.
- Gain with adjustment potentiometer.
- Mains powered, 50/60 Hz. Mains lead with bipolar plug.
- External plastic box. F type connection. It has an adapter for easy attachment to wall.

MODEL	REF. / EAN code	Serie ATP200	
ATP200-C69	3583 / 8435136435839	Frequency range MHz	47 - 862
ATP200-C60	3434 / 8435136434344		47 - 790 (1 st dividend)
ATP200-C48	3584 / 8435136435846		47 - 694 (2 nd dividend)
Inputs			1
Outputs			2
Gain		dB	25
Gain adjustment		dB	15
Output level		dB μ V	103
Noise figure		dB	<4
Mains supply voltage		VAC	100 - 240
Consumption		W	<1,5
Dimensions		mm	90 x 58 x 27

Graphs of gain control

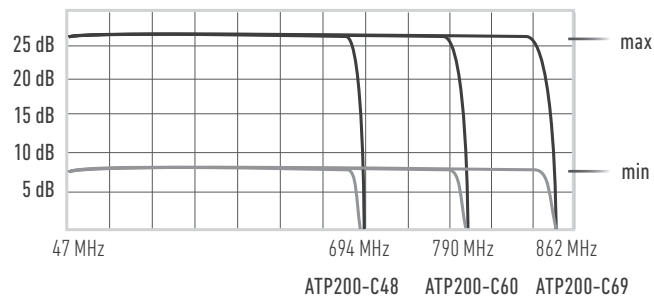

Example d'application

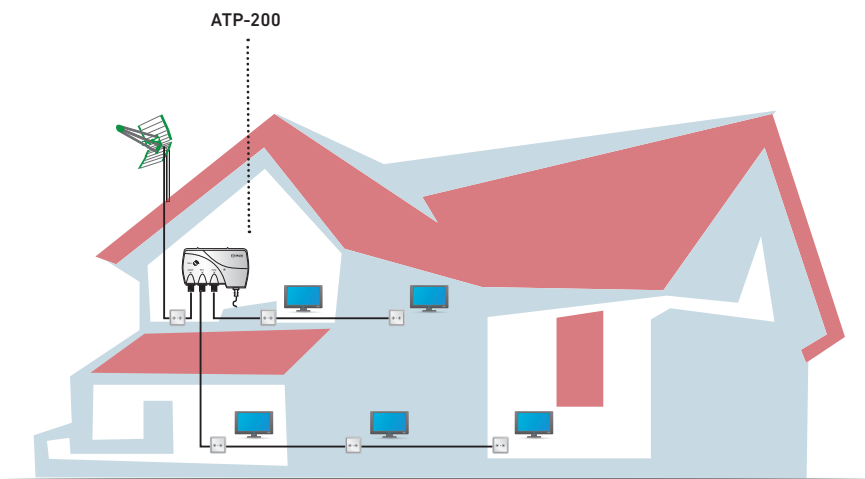

Quick Fix & Release bracket

