



New kit shielded mast Amplifier + Power supply

SBA-103

- DC bypass for active antennas
- Increased output power up to 113 dBμV (DIN 45004B IMD-60dB)
- Supply voltage +12 VDC and +24 VDC



Very high
UHF gain



Very low operative
noise figure



Interstage variable
attenuator




Óptimo consumo
energético



Adaptable a las cajas
de registro estándar

APB-224-M

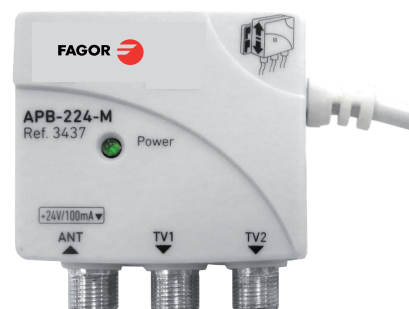

Mast amplifier + Power supply kit

MODEL	REF.	DESCRIPTION
JSBA-103-C48	1328	Amplifier SBA-103-C48 + Power supply APB-224-M

Main features SBA-103-C48 amplifier

- Increased output power
- DC bypass for active antennas
- Supply voltage +12 VDC and +24 VDC
- Optimum design for very low noise figure
- Internal zamak box with F type ports
- Models adapted to the first and second digital dividend (LTE)


MODEL	SBA-103-C48	
REF.	1304	
Frequency range	MHz	470 - 694
Input	1 UHF	
Output	1	
Gain	dB	> 34
Gain adjustment	dB	0 - 15
Noise figure	dB	≤ 3
Output level (DIN 45004B IMD-60dB)	dBμV	113
Supply voltage	VDC mA	+12 / +24 60 / 70
DC bypass	Yes	
Operating temperature	°C	-10 ... +60
Protection level	IP	IP54
Dimensions	mm	96 x 125 x 46
Weight	kg	0.370

Main features APB-224-M power supply

- The smallest on the market
- Optimum power consumption. Low power switch mode
- Adaptable to standard boxes 80x80 mm
- Mounting without tools
- Easy connection and assembly thanks to an innovative wall fixing system. No need to pierce the wall thanks to the fixation with adhesive
- Built-in bubble level
- 1 RF input connector + DC output port /1 or 2 RF outputs ports

MODEL	APB-224-M	
REF.	3437	
Regulation type	Switch mode	
Outputs	2	
Mains voltage (50 Hz)	VAC	100 - 240
Output voltage	VDC	+24 (±5%)
Output voltage	mA	100
Frequency range	MHz	47 - 862
RF insertion loss	dB	≤ 4
Efficiency	%	>70
Dimensions	mm	50 x 50 x 25
Weight	kg	0.175

Example d'installation

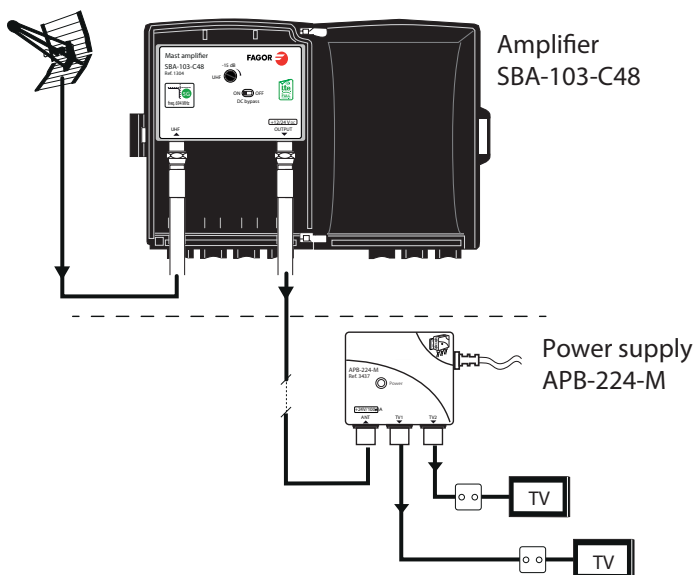

Quick Fix & Release bracket

