

FibreIRS 2SATODU16

Fibre Integrated Reception System




global **invacom**
completing the picture

- 2 Satellites distributed via a single fibre
- Outputs 2 satellites for distribution through 2 x 16 PON
- Fully weatherproof (IP65)
- PSU, mast strap & mounting bracket included



Fully weatherproof, the 2SATODU16 is designed for mounting at the antenna location. It accepts & combines signals from two wholeband LNB's & terrestrial antennas (DTT/DAB/FM). The combined signal is optically frequency modulated on to a laser inside the 2SATODU16 & then equally split to 2 optical outputs (FC/PC) for distribution through a Passive Optical Network (PON) of FibreIRS optical splitters. Each output of the 2SATODU16 can feed a PON of 16 points. Different FibreIRS GTU's can be connected at any point (Quad and Quatro available). Maximum distance 1km

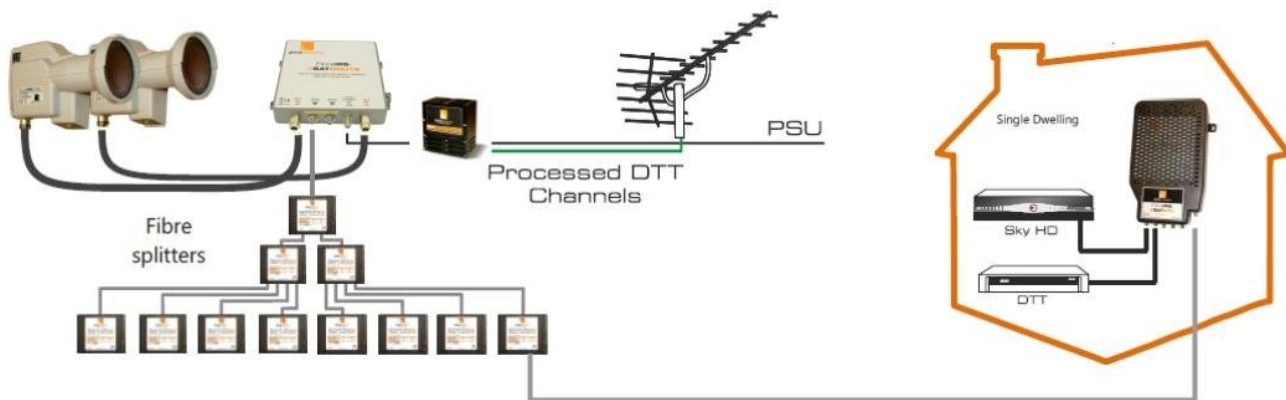

Technical Specifications

Product Part No.

FibreIRS 2SATODU16

F102046

Satellite 1 + 2 (Electrical)			
Parameter	Min	Max	Notes
RF frequency range			
Vertical polarisation (V pol)	0.95-3.0GHz		
Horizontal polarisation (H pol)	3.4-5.45GHz		
Nominal impedance	50Ω		
Return loss	9dB		
Gain variation across : V pol		4dB	
: H pol		7dB	H pol has a 3dB upward slope
AGC adjustment range	15dB		
Noise figure @ max gain		15dB	
217-862MHz rejection	20dB		

FibreIRS 2SATODU16

Fibre Integrated Reception System



global **invacom**
completing the picture

FM,DAB & DTT (Electrical)			
RF frequency range			
DTT	470-854MHz		
DAB	174-230MHz		
FM	88-108MHz		
Nominal impedance	75Ω		
Return loss	10dB		
Input power range	67dBμV	97dBμV	DAB power levels need to be set 12dB below DTT FM power level needs to be same as DTT
Recommended DTT input	70dBμV		For 6 digital multiplexes
Gain variation across band			4dB
Gain ripple across 8MHz in DTT			.5dB
AGC adjustment range:	30dB		
Noise figure @ max gain			10dB
950-2150MHz rejection	15dB		

FM,DAB,DTT Satellite 1 + 2 (Optical)			
Parameter	Min	Max	Notes
Laser optical wavelength (Sat1)	1310nm±20		
Laser optical wavelength (Sat2)	1550nm±20		
Laser optical wavelength (DTT)	1310nm±20		
Laser optical power (Sat1 + DTT)	7.0dBm		Typical
Laser optical power (Sat2)	7.0dBm		Typical

DC Specification		
Power supply voltage	20V±0.5	Supplied on terrestrial port
LNBS supply voltage	6.2V±0.2	Fed through satellite inputs
Current consumption	<600mA	Including Wholeband LNBS

Connectors	
Output	Fibre optic FC/UPC
Satellite inputs	N
DTT/DAB/FM	F

Environmental Specification	
Operating temperature	-10 to 50°C
Storage temperature	-30 to 60°C

Optical cabling	
Fibre type	Single mode
Standard	GI - approved G657a

Note: Specifications subject to change without notice

Global Invacom will only support systems that are installed using GI approved fibre cabling, splitters and accessories.

Global Invacom Ltd. Winterdale Manor, Southminster Road, Althorne, Essex. CM3 6BX
Tel: +44 (0)1621 743440 Fax: +44 (0)1621 743676 email: sales@globalinvacom.com