




IKUSI
velatia

smartexperience

Passive splitter 5 inputs (4 SAT+1TERR) 10 outputs

A solution to extend the installation to a greater number of users.

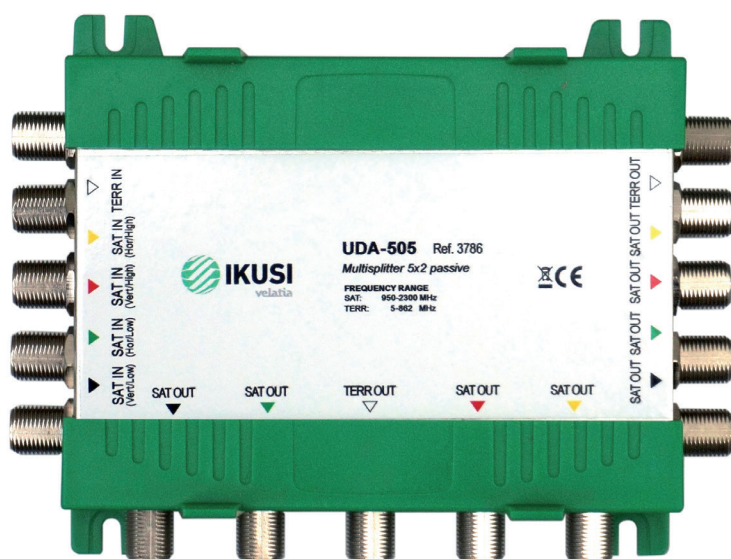

Multi-splitter Passive



For use with QUATTRO LNB

- Offered as SAT-only devices or including terrestrial section.
- For use with QUATTRO LNB.

MODEL		UDA-505	UDA-500
REF.		3786	3787
Splitter type		PASSIVE	ACTIVE
Number of inputs		5 (4 SAT inputs+1 TERR input)	5 (4 SAT inputs+1 TERR input)
Number of outputs		10	10
Frequency range SAT	MHz	950 - 2300	950 - 2300
Frequency range TERR	MHz	5 - 862	48 - 862
Insertion loss SAT	dB	5	-1
Insertion loss TERR	dB	4	-7
Isolation between trunks	dB	35	35
Isolation between outputs of each SAT splitter	dB	13	13
Isolation between outputs of each TERR splitter	dB	7	13
Maximum input level SAT	dBµV	-	94
Maximum input level TERR	dBµV	-	92
Maximum output level SAT (trunk or split)	dBµV	-	96
Maximum output level TERR (trunk or split)	dBµV	-	100
Total current level SAT (tap)	mA	-	115
Operating temperature	°C	-30 ... +70	-30 ... +70
Dimensions (w x d x h)	cm	13.5 x 10.4 x 4.1	13.5 x 10.4 x 4.1

Application example

