
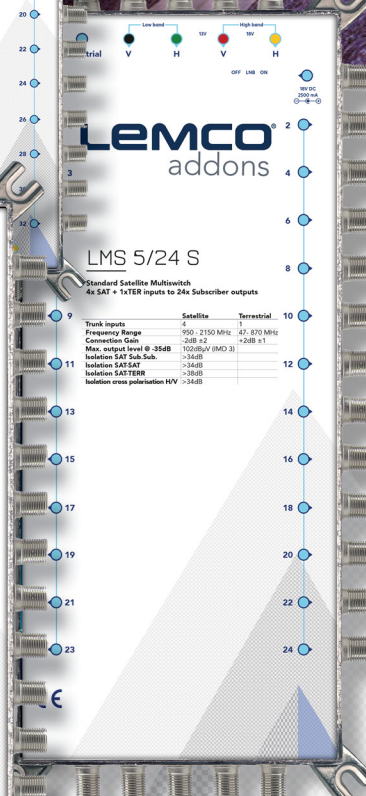


Multiswitches

5

- INPUT SINGLE
- INPUT CASCADE

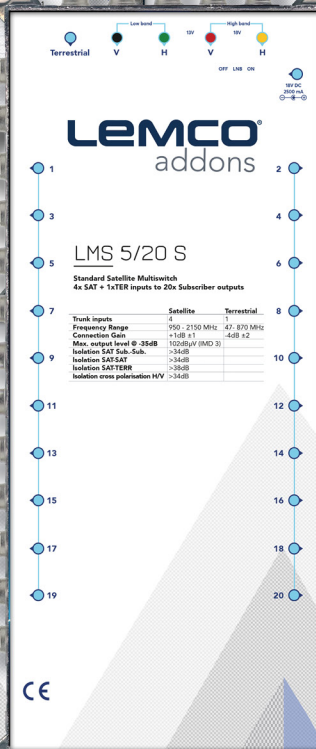

Multiswitches

LEMCO's new Multiswitches utilize new generation components that provide zero port failure, work at low signal levels with high isolation, and have low energy consumption by using an SMPS power supply unit. The outer case is made completely out of ZAMAK, providing high quality of construction, high endurance even in the most extreme environments and superior electromagnetic shielding.



5-INPUT SINGLE

LMS 5/8 S

Technical Specifications



Input	
Trunc inputs (SAT+TER)	4+1
Frequency Range SAT	950 - 2150 MHz
Frequency Range TER	47 - 870 MHz
Connector	F- female
Impedance	75Ω
Multiswitches commands	13/18 V, 0/22 kHz, DiSEqC 2.0, Toneburst VDC

Output	
No of Subscribers	8
Gain TER	-2dB ±1
Gain SAT	+3dB ±1
Max. output level @ -35dB (IMD3)	102dBμV
Connector	F- female
Impedance	75Ω

Isolation	
Isolation SAT Subscriber-Subscriber	>36dB
Isolation SAT-SAT	>34dB
Isolation SAT-TER	>34dB
Isolation cross polarisation H/V	>34dB

General	
Power supply	+18VDC
Power supply consumption	350mA max.
Operating temperature	0 °C to 40 °C
Storage temperature	-10 °C to +70 °C
Humidity	Up to 90%
Dimensions	135 x 135 x 35 mm
Weight	0.469 Kg

5-INPUT CASCADE

LMS 5/8 C

Technical Specifications



Input	
Trunc inputs (SAT+TER)	4+1
Frequency Range SAT	950 - 2150 MHz
Frequency Range TER	47 - 870 MHz
Connector	F- female
Impedance	75Ω
Multiswitches commands	13/18 V, 0/22 kHz, DiSEqC 2.0, Toneburst VDC

Output	
No of Subscribers	8
Gain TER	-2dB ±1
Gain SAT	+3dB ±1
Max. output level @ -35dB (IMD3)	102dBμV
Connector	F- female
Impedance	75Ω

Isolation	
Isolation SAT Subscriber-Subscriber	>36dB
Isolation SAT-SAT	>34dB
Isolation SAT-TER	>34dB
Isolation cross polarisation H/V	>34dB

Cascade	
No of outputs (SAT+TER)	4+1
Cascade Loss TER	-5dB ±1
Cascade Loss SAT	-2dB ±1

General	
Power supply	+18VDC (Not included)
Power supply consumption	350mA max.
Operating temperature	0°C to 40°C
Storage temperature	-10°C to +70°C
Humidity	Up to 90%
Dimensions	135 x 135 x 35 mm
Weight	0.469 Kg

5-INPUT SINGLE

LMS 5/12 S

Technical Specifications



Input	
Trunc inputs (SAT+TER)	4+1
Frequency Range SAT	950 - 2150 MHz
Frequency Range TER	47 - 870 MHz
Connector	F- female
Impedance	75Ω
Multiswitches commands	13/18 V, 0/22 kHz, DiSEqC 2.0, Toneburst VDC

Output	
No of Subscribers	12
Gain TER	+3dB ±1
Gain SAT	+3dB ±2
Max. output level @ -35dB (IMD3)	102dBμV
Connector	F- female
Impedance	75Ω

Isolation	
Isolation SAT Subscriber-Subscriber	>35dB
Isolation SAT-SAT	>33dB
Isolation SAT-TERR	>34dB
Isolation cross polarisation H/V	>33dB

General	
Power supply	+18VDC
Power supply consumption	350mA max.
Operating temperature	0 °C to 40 °C
Storage temperature	-10 °C to +70 °C
Humidity	Up to 90%
Dimensions	166 x 135 x 35 mm
Weight	0.564 Kg

5-INPUT CASCADE

LMS 5/12 C

Technical Specifications



Input	
Trunc inputs (SAT+TER)	4+1
Frequency Range SAT	950 - 2150 MHz
Frequency Range TER	47 - 870 MHz
Connector	F- female
Impedance	75Ω
Switch commands	13/18 V, 0/22 kHz, DiSEqC 2.0, Toneburst VDC

Output	
No of Subscribers	12
Gain TER	-1dB ±2
Gain SAT	+3dB ±1
Max. output level @ -35dB (IMD3)	102dBμV
Connector	F- female
Impedance	75Ω

Isolation	
Isolation SAT Subscriber-Subscriber	>35dB
Isolation SAT-SAT	>33dB
Isolation SAT-TER	>34dB
Isolation cross polarisation H/V	>33dB

Cascade	
No of outputs (SAT+TER)	4+1
Cascade Loss TER	-5dB ±1
Cascade Loss SAT	-2dB ±1

General	
Power supply	+18VDC (Not included)
Power supply consumption	350mA max.
Operating temperature	0 °C to 40 °C
Storage temperature	-10 °C to +70 °C
Humidity	Up to 90%
Dimensions	166 x 135 x 35 mm
Weight	0.564 Kg

5-INPUT SINGLE

LMS 5/16 S

Technical Specifications



Input	
Trunc inputs (SAT+TER)	4+1
Frequency Range SAT	950 - 2150 MHz
Frequency Range TER	47 - 870 MHz
Connector	F- female
Impedance	75Ω
Multiswitches commands	13/18 V, 0/22 kHz, DiSEqC 2.0, Toneburst VDC

Output	
No of Subscribers	16
Gain TER	+2dB ±1
Gain SAT	+1dB ±2
Max. output level @ -35dB (IMD3)	102dBμV
Connector	F- female
Impedance	75Ω

Isolation	
Isolation SAT Subscriber-Subscriber	>34dB
Isolation SAT-SAT	>34dB
Isolation SAT-TERR	>37dB
Isolation cross polarisation H/V	>34dB

General	
Power supply	+18VDC
Power supply consumption	350mA max.
Operating temperature	0 °C to 40 °C
Storage temperature	-10 °C to +70 °C
Humidity	Up to 90%
Dimensions	198 x 135 x 35 mm
Weight	0.658 Kg

5-INPUT CASCADE

LMS 5/16 C

Technical Specifications



Input	
Trunc inputs (SAT+TER)	4+1
Frequency Range SAT	950 - 2150 MHz
Frequency Range TER	47 - 870 MHz
Connector	F- female
Impedance	75Ω
Multiswitches commands	13/18 V, 0/22 kHz, DiSEqC 2.0, Toneburst VDC

Output	
No of Subscribers	16
Gain TER	-2dB ±2
Gain SAT	+2dB ±1
Max. output level @ -35dB (IMD3)	102dBμV
Connector	F- female
Impedance	75Ω

Isolation	
Isolation SAT Subscriber-Subscriber	>34dB
Isolation SAT-SAT	>34dB
Isolation SAT-TER	>37dB
Isolation cross polarisation H/V	>34dB

Cascade	
No of outputs (SAT+TER)	4+1
Cascade Loss TER	-5dB ±1
Cascade Loss SAT	-3dB ±2

General	
Power supply	+18VDC (Not included)
Power supply consumption	350mA max.
Operating temperature	0 °C to 40 °C
Storage temperature	-10 °C to +70 °C
Humidity	Up to 90%
Dimensions	198 x 135 x 35 mm
Weight	0.658 Kg

5-INPUT SINGLE

LMS 5/20 S

Technical Specifications

Input	
Trunc inputs (SAT+TER)	4+1
Frequency Range SAT	950 - 2150 MHz
Frequency Range TER	47 - 870 MHz
Connector	F- female
Impedance	75Ω
Multiswitches commands	13/18 V, 0/22 kHz, DiSEqC 2.0, Toneburst VDC

Output	
No of Subscribers	20
Gain TER	-4dB ±2
Gain SAT	+1dB ±1
Max. output level @ -35dB (IMD3)	102dBμV
Connector	F- female
Impedance	75Ω

Isolation	
Isolation SAT Subscriber-Subscriber	>34dB
Isolation SAT-SAT	>34dB
Isolation SAT-TERR	>38dB
Isolation cross polarisation H/V	>34dB

General	
Power supply	+18VDC
Power supply consumption	450mA max.
Operating temperature	0 °C to 40 °C
Storage temperature	-10 °C to +70 °C
Humidity	Up to 90%
Dimensions	278 x 135 x 35 mm
Weight	0.859 Kg



5-INPUT CASCADE

LMS 5/20 C

Technical Specifications


Input	
Trunc inputs (SAT+TER)	4+1
Frequency Range SAT	950 - 2150 MHz
Frequency Range TER	47 - 870 MHz
Connector	F- female
Impedance	75Ω
Multiswitches commands	13/18 V, 0/22 kHz, DiSEqC 2.0, Toneburst VDC

Output	
No of Subscribers	20
Gain TER	-4dB ±2
Gain SAT	+1dB ±1
Max. output level @ -35dB (IMD3)	102dBμV
Connector	F- female
Impedance	75Ω

Isolation	
Isolation SAT Subscriber-Subscriber	>34dB
Isolation SAT-SAT	>34dB
Isolation SAT-TERR	>38dB
Isolation cross polarisation H/V	>34dB

Cascade	
No of outputs (SAT+TER)	4+1
Cascade Loss TER	-5dB ±1
Cascade Loss SAT	-4dB ±1

General	
Power supply	+18VDC (Not included)
Power supply consumption	450mA max.
Operating temperature	0°C to 40°C
Storage temperature	-10°C to +70°C
Humidity	Up to 90%
Dimensions	278 x 135 x 35 mm
Weight	0.859 Kg



5-INPUT SINGLE

LMS 5/24 S


Technical Specifications

Input	
Trunc inputs (SAT+TER)	4+1
Frequency Range SAT	950 - 2150 MHz
Frequency Range TER	47 - 870 MHz
Connector	F- female
Impedance	75Ω
Multiswitches commands	13/18 V, 0/22 kHz, DiSEqC 2.0, Toneburst VDC

Output	
No of Subscribers	24
Gain TER	+2dB ±1
Gain SAT	-2dB ±2
Max. output level @ -35dB (IMD3)	102dBμV
Connector	F- female
Impedance	75Ω

Isolation	
Isolation SAT Subscriber-Subscriber	>34dB
Isolation SAT-SAT	>34dB
Isolation SAT-TERR	>38dB
Isolation cross polarisation H/V	>34dB

General	
Power supply	+18VDC
Power supply consumption	450mA max.
Operating temperature	0 °C to 40 °C
Storage temperature	-10 °C to +70 °C
Humidity	Up to 90%
Dimensions	278 x 135 x 35 mm
Weight	0.859 Kg

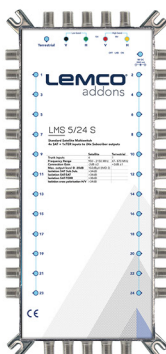

5-INPUT CASCADE

LMS 5/24 C

Technical Specifications


Input	
Trunc inputs (SAT+TER)	4+1
Frequency Range SAT	950 - 2150 MHz
Frequency Range TER	47 - 870 MHz
Connector	F- female
Impedance	75Ω
Multiswitches commands	13/18 V, 0/22 kHz, DiSEqC 2.0, Toneburst VDC

Output	
No of Subscribers	24
Gain TER	-4dB ±2
Gain SAT	+1dB ±1
Max. output level @ -35dB (IMD3)	102dBμV
Connector	F- female
Impedance	75Ω

Isolation	
Isolation SAT Subscriber-Subscriber	>34dB
Isolation SAT-SAT	>34dB
Isolation SAT-TERR	>38dB
Isolation cross polarisation H/V	>34dB

Cascade	
No of outputs (SAT+TER)	4+1
Cascade Loss TER	-5dB ±1
Cascade Loss SAT	-4dB ±1

General	
Power supply	+18VDC (Not included)
Power supply consumption	450mA max.
Operating temperature	0°C to 40°C
Storage temperature	-10°C to +70°C
Humidity	Up to 90%
Dimensions	278 x 135 x 35 mm
Weight	0.859 Kg

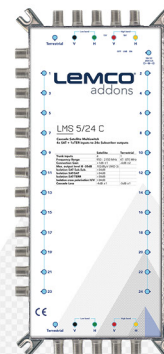

5-INPUT SINGLE

LMS 5/32 S

Technical Specifications

Input

Trunc inputs (SAT+TER)	4+1
Frequency Range SAT	950 - 2150 MHz
Frequency Range TER	47 - 870 MHz
Connector	F- female
Impedance	75Ω
Multiswitches commands	13/18 V, 0/22 kHz, DiSEqC 2.0, Toneburst VDC

Output


No of Subscribers	32
Gain TER	+1dB ±1
Gain SAT	-5dB ±2
Max. output level @ -35dB (IMD3)	102dBμV
Connector	F- female
Impedance	75Ω

Isolation

Isolation SAT Subscriber-Subscriber	>34dB
Isolation SAT-SAT	>34dB
Isolation SAT-TER	>38dB
Isolation cross polarisation H/V	>34dB

General

Power supply	+18VDC
Power supply consumption	450mA max.
Operating temperature	0 °C to 40 °C
Storage temperature	-10 °C to +70 °C
Humidity	Up to 90%
Dimensions	326 x 135 x 35 mm
Weight	0.985 Kg

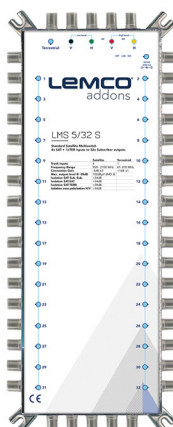

5-INPUT CASCADE

LMS 5/32 C

Technical Specifications

Input

Trunc inputs (SAT+TER)	4+1
Frequency Range SAT	950 - 2150 MHz
Frequency Range TER	47 - 870 MHz
Connector	F- female
Impedance	75Ω
Multiswitches commands	13/18 V, 0/22 kHz, DiSEqC 2.0, Toneburst VDC

Output

No of Subscribers	32
Gain TER	-7dB ±2
Gain SAT	+0dB ±1
Max. output level @ -35dB (IMD3)	102dBμV
Connector	F- female
Impedance	75Ω

Isolation


Isolation SAT Subscriber-Subscriber	>34dB
Isolation SAT-SAT	>34dB
Isolation SAT-TER	>38dB
Isolation cross polarisation H/V	>34dB

Cascade

No of outputs (SAT+TER)	4+1
Cascade Loss TER	-5dB ±1
Cascade Loss SAT	-5dB ±2

General

Power supply	+18VDC (Not included)
Power supply consumption	450mA max.
Operating temperature	0°C to 40°C
Storage temperature	-10°C to +70°C
Humidity	Up to 90%
Dimensions	326 x 135 x 35 mm
Weight	0.985 Kg

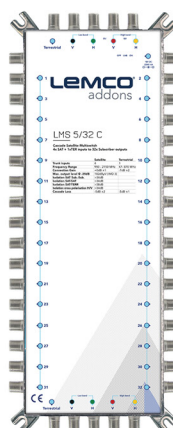

Latheas 46 - 13678 Athens - Greece
 Tel: +30 210 2811401 - Fax: +30 210 2825755
 Email: info@lemco.gr - www.lemco.tv

follow us: [f facebook.com/Lemco](https://www.facebook.com/Lemco) twitter.com/lemcodtv [in linkedin.com/company/lemco](https://www.linkedin.com/company/lemco)

LEMCO
addons